
ELECTRIC/HYDRAULIC CORNER TILTER - EMC-4848-4 *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

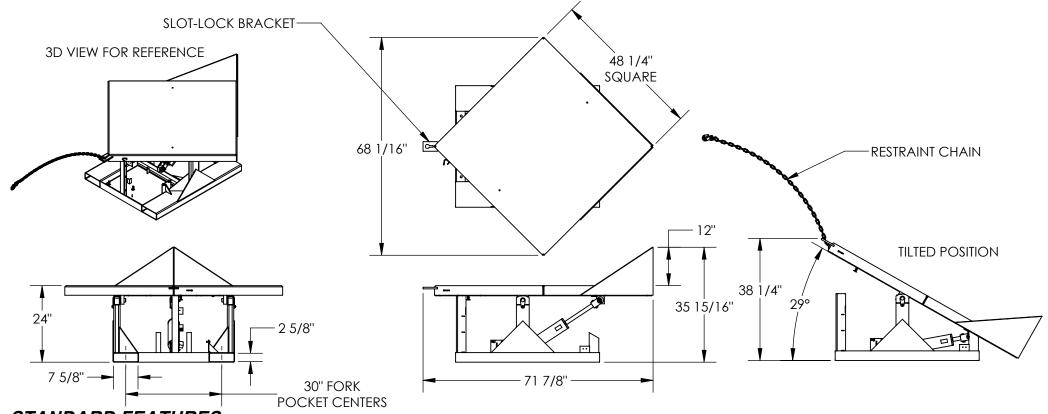

STANDARD FEATURES

MODEL NUMBER IS EMC-4848-4 OVERALL WIDTH IS 68 1/16" **USABLE WIDTH IS 48"** OVERALL LENGTH IS 71 7/8" **USABLE LENGTH IS 48"** OVERALL HEIGHT IS 35 15/16" TILTED HEIGHT IS 38 1/4" MAX CAPACITY IS 4000 LBS. PLATFORM LEVEL HEIGHT IS 24" MAXIMUM TILT ANGLE IS 29° 2 HP POWER UNIT ALL STEEL CONSTRUCTION WELDING TO MEET AWS CHROME PLATED CYLINDERS 3000 PSI HYDRAULIC RATING WARNING: CHECK STATE AND LOCAL CODES!! SAFETY SLOT-LOCK CHAIN RESTRAINT BRACKET **DURABLE LIQUID PAINT** VESTIL ROYAL BLUE FINISH USABLE FORK POCKET - 2 5/8"H X 7 5/8"W 30" FORK POCKET CENTERS

SPECIAL FEATURES

NONE

LEASE	CIRC	LE	SPE	CI	FIC	CATI	ONS
POWER	AC		* 	C		* AIR/OIL	
MOTOR V	GE	115	20	3	230	460	
DEDICATED CIRCUIT REQUIRED							
MOTOR PHASE		SINGLE		THREE			
CONTROL		HAND		* FOOT			
~ ALL BATTERY CHARGERS ARE 115V AC ~							
BATTERY CHRG.		REMOTE		E	ON-BOARD		
CHRG. INDICATOR		YES			NO		
* AVAILABLE AT ADDITIONAL COST							

DIMENSION TOLERANCE ± 1/4"

38-007-003

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS UNITS REQUIRING APPROVAL DRAWINGS OR **MODIFIED ARE NON-RETURNABLE** [] As drawn [] As marked

Signed: Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

0

DISTRIBUTOR'S NAME:

Quoted lead time: $_{\mathbf{Y}}$

VESTIL MANUFACTURING W.O.# DRAWN BY: MTS SALES: X 02/20/14 reference: X SCALE: 1:30 FILE NAME:

QUOTE #

Χ