

APPROX WEIGHT: 1.93 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

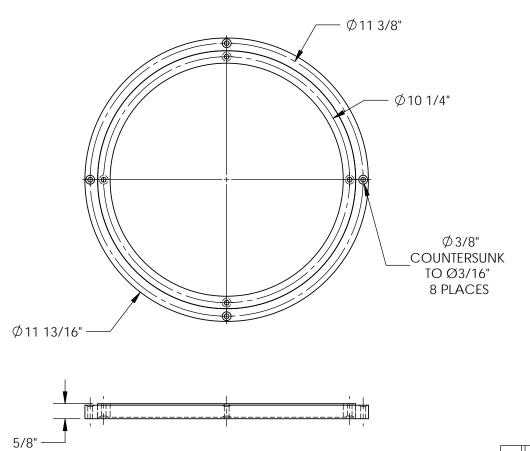



## STANDARD FEATURES

**MODEL NUMBER IS CA-5-12** UNIFORM CAPACITY IS 500 LBS. OVERALL DIAMETER IS Ø11 13/16" HEIGHT IS 5/8" OUTER HOLES ON Ø11 3/8" CENTERS INNER HOLES ON Ø10 1/4" CENTERS INTERNALLY SEALED ROLLER BEARINGS **ALUMINUM CONSTRUCTION** 

## SPECIAL FEATURES

NONE

R 0

Ρ

Ρ

## DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE [ ] As drawn [ ] As marked

Signed: Date:

> LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

_		OF SIGNED AT I NOVAL DINAWING		
FOR INTERNAL USE ONLY				P.O.# X
PROJECT SIGN OFF		VESTIL MANUFACTURING		W.O.# v
SALES		DDAWN DV:	IDATE.	CALEC
ENG.		DRAWN BY: TJM	DATE: 03/18/15	SALES: X
FAB.		REFERENCE: X	SCALE: 1:4	FILE NAME:
POWER		Quoted lead time: $\chi$	QUOTE # X	20-007-134