
FORK MOUNTED INVERTED RUG RAM - CRP-60

APPROX WEIGHT: 376.24 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

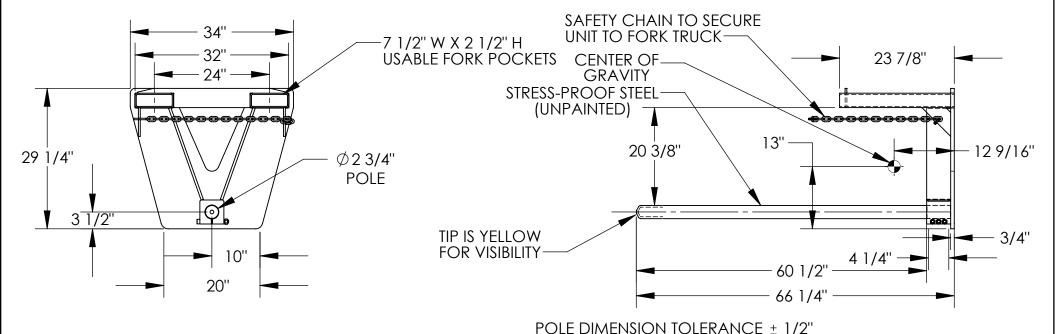

HORIZONTAL CENTER OF GRAVITY: 12 9/16" **VERTICAL CENTER OF GRAVITY: 13"**

LOST LOAD: 376 LBS. (APPROX.)
MINIMUM EFFECTIVE THICKNESS= LESS THAN 1"

STANDARD FEATURES

MODEL NUMBER: CRP-60

CAPACITY: 2,500 LBS. UNIFORM CAPACITY

POLE LENGTH: 60 1/2" POLE DIAMETER: 2 3/4" **OVERALL LENGTH: 66 1/4" OVERALL HEIGHT: 29 1/4" OVERALL WIDTH: 34"**

FORK POCKETS ARE 7 1/2" W x 2 1/2" H

USABLE ON 24" FORK CENTERS

WITH SAFETY CHAIN TO SECURE TO THE UNIT TO THE MAST OF THE FORK TRUCK **DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES NONE

NOTE: NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

DIMENSION TOLERANCE ± 1/4"

	APPROVA	I, THE UNDERSIGNE REPRESENTED SA REQUIREMENTS. I A CONFIRM PR COMPLIANCE WITH AND LOCAL RE UNITS REQUIRIN MODIFIED [] As	TISFIES DE LLSO ACK CODUCT A 1 ALL APF GULATION NG APPI ARE NO	SIGN AND NOWLEDG NND INSTAL PLICABLE FE NS AND STA ROVAL D	DIMENSION E MY DUTY TO LATION EDERAL, STATE ANDARDS. PRAWINGS OR RNABLE
	L	Signed:			Date:
		Printed Name:	PON RECE	PT OF SIGNE	ED APPROVAL DRAWING
DISTRIBUTOR'S NAME: P.O.# X					
VESTIL MANUFACTURING W.O.# X					W.O.# X
DRAWN BY: PAK			DATE: 10/	18/2023	SALES: X
REFERENCE: X SCALE: 1:20 FILE NAME:					
QUOTED LEAD TIME: X					08-007-499