
ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-3464-3-55

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

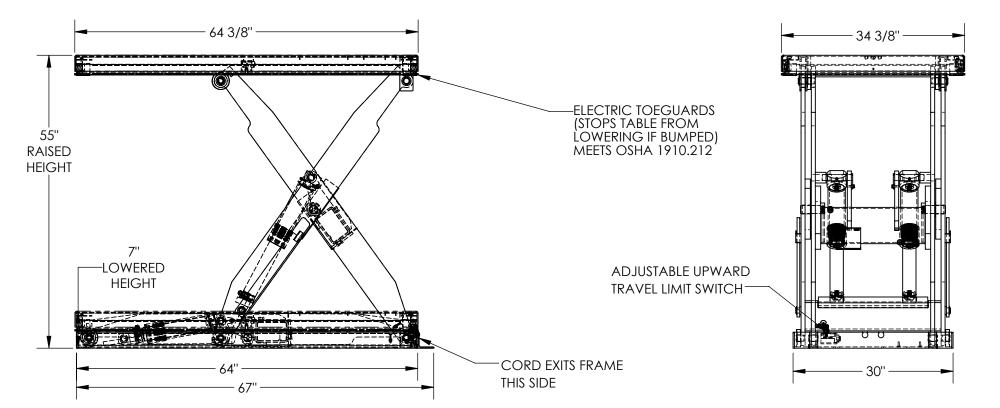

DIMENSION TOLERANCE ± 1/4"

STANDARD FEATURES

MODEL NUMBER IS EHLT-3464-3-55 PLATFORM WIDTH IS 34 3/8" PLATFORM LENGTH IS 64 3/8" PLATFORM RAISED HEIGHT IS 55" PLATFORM LOWERED HEIGHT IS 7" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 3,000 LBS INTERNAL POWER UNIT STANDARD CONTROL IS 24 VOLT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDER INSTALLED ROD DOWN **EMERGENCY SAFETY STOP HYDRAULIC FUSES** IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL **DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES NONE

DI FASE CIRCI E SPECIFICATIONS.

FLEAGE CINCLE SFECII ICATIONS.										
	POWER	POWER AC			: (1:	AIR/OIL		VOIL		
	MOTOR V	OLTA	GE -	115	200	3	230	460		
	DEDICATED CIRCUIT REQUIRED 60Hz									
	MOTOR P	HASE	SINGLE			THREE				
	CONTR	OL.	HAND			ГООТ				

DECK TOLERANCE ± 1/2" TABLE HEIGHT TOLERANCE ± 1/2" DECK FLATNESS ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO Р CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE Ρ AND LOCAL REGULATIONS AND STANDARDS R UNITS REQUIRING APPROVAL DRAWINGS OR 0 MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked

Signed:

Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING DISTRIBUTOR'S NAME:

VESTIL	MANUFACTURING	
DAIA/ALDV	D. TE	-

W.O.# DRAWN BY: BCN SALES: X 08/24/2017 REFERENCE: X

SCALE: 1:18 FILE NAME: QUOTED LEAD TIME: X QUOTE # 24-007-231-001

Χ