
ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-3648-1-43

APPROX WEIGHT: 627.96 lbs

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

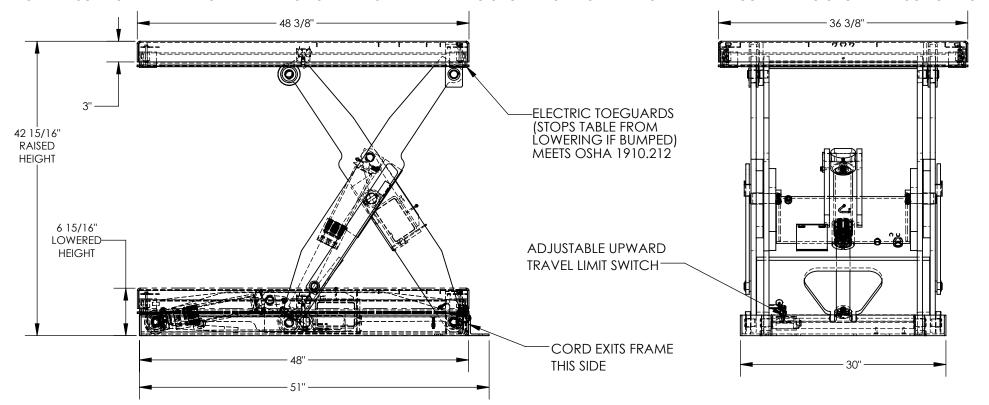

DIMENSION TOLERANCE ± 1/4"

STANDARD FEATURES

MODEL NUMBER IS EHLT-3648-1-43 PLATFORM WIDTH IS 36 3/8" PLATFORM LENGTH IS 48 3/8" PLATFORM RAISED HEIGHT IS 43 PLATFORM LOWERED HEIGHT IS 7" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 1,000 LBS INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN **EMERGENCY SAFETY STOP HYDRAULIC FUSES** IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL **DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES

NONE

PLEASE CIRCLE SPECIFICATIONS:

ľ	FLEASE CINCLE SPECIFICATIONS.										
	POWER	AC		DC (1:		2∀)	Alf	R/OIL			
	MOTOR V	OLTA	GE 🗗	H15	208	3	230	460			
DEDICATED CIRCUIT REQUIRED 60Hz											
	MOTOR P	HASE	SII	4GFE		THREE					
	CONTR	:OL	H	IAND .		FOC		TC			

DECK TOLERANCE ± 1/2"

TABLE HEIGHT TOLERANCE ± 1/2"

DECK FLATNESS ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OF

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: Date:

Printed Name:

R

0

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWIN

LEAD TIME WILL START UP	APPROVAL DRAWIN		
DISTRIBUTOR'S NAME:	P.O.# X		
VESTIL MANUFAC	W.O.# X		
drawn by: BCN	DATE: 8/2	8/201/	SALES: X
reference: X		SCALE: 1:14	
QUOTED LEAD TIME: X	QUOTE #		24-007-031-001