
## ELECTRIC HYDRAULIC SCISSOR TABLE EHLT-3672-2-43

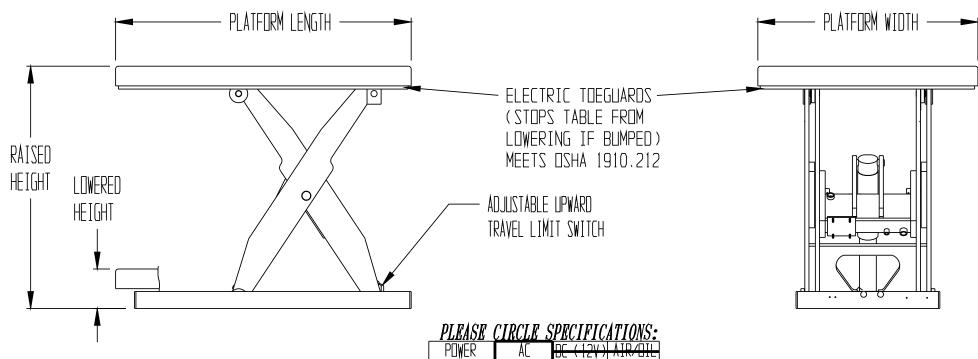

MOTOR VOLTAGE 115 208

CONTROL

BATTERY CHRG.

DEDICATED CIRCUIT REQUIRED

SINGLE

HÀND

## STANDARD FEATURES:

SCISSOR TABLE MODEL NUMBER IS EHLT-3672-2-43 MOTOR PHASE PLATFORM WIDTH IS 36 INCHES PLATFORM LENGTH IS 72 INCHES PLATFORM RAISED HEIGHT IS 43 INCHES CHRG. INDICATOR PLATFORM LOWERED HEIGHT IS 7 INCHES IPOWER UNIT LOCATION I TINTERNAL TABLE CAPACITY (EVENLY DISTRIBUTED LOAD) IS 2,000 LBS. STANDARD CONTROL IS WEATHERTIGHT HAND PENDANT ON 8' CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSES IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL

## SPECIAL FEATURES:

24 VAC CONTROL VOLTAGE

NUNE

Any additions, deletions or	DISTRIBUTOR
omissions must be corrected	VEST
on this drawing, as this drawing	nplwl Ry.

|will be considered all inclusive.∥DRAWN BY: All graphics provided are for referenceonly. If certain dimensions are critical please verify those dimensions with your salesperson

TIL MFG

P.O.#: \_ ₩.□.#: \_

[ ] As marked

Date:

ZYTEZ: \_

SCALE: \_

[ ] Ås drawn

Deck tolerances +/- 1/2"

Deck Flatness ± 1/4"

Table height tolerances +/- 1/2"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED

SATISFIES DESIGN & DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE

MY DUTY TO CONFIRM PRODUCT & INSTALLATION COMPLIANCE WITH ALL

APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS & STANDARDS ALL SPECIAL UNITS ARE NON-RETURNABLE

LEAD TIME WILL START LIPON RECEIPT OF SIGNED APPROVAL DRAWING

DRWG./FILE NAME:

REFERENCE: \_

QUOTE #: QUOTED LEADTIME: \_

EHLT-3672-2-43

S'S NAME:

\*EXTERNAL

DATE: \_