


LIFT MASTER BOOM, HIGH RISE, TELESCOPING BOOM - LM-HRT-6-24

APPROX WEIGHT: 985.75 lbs.
 DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

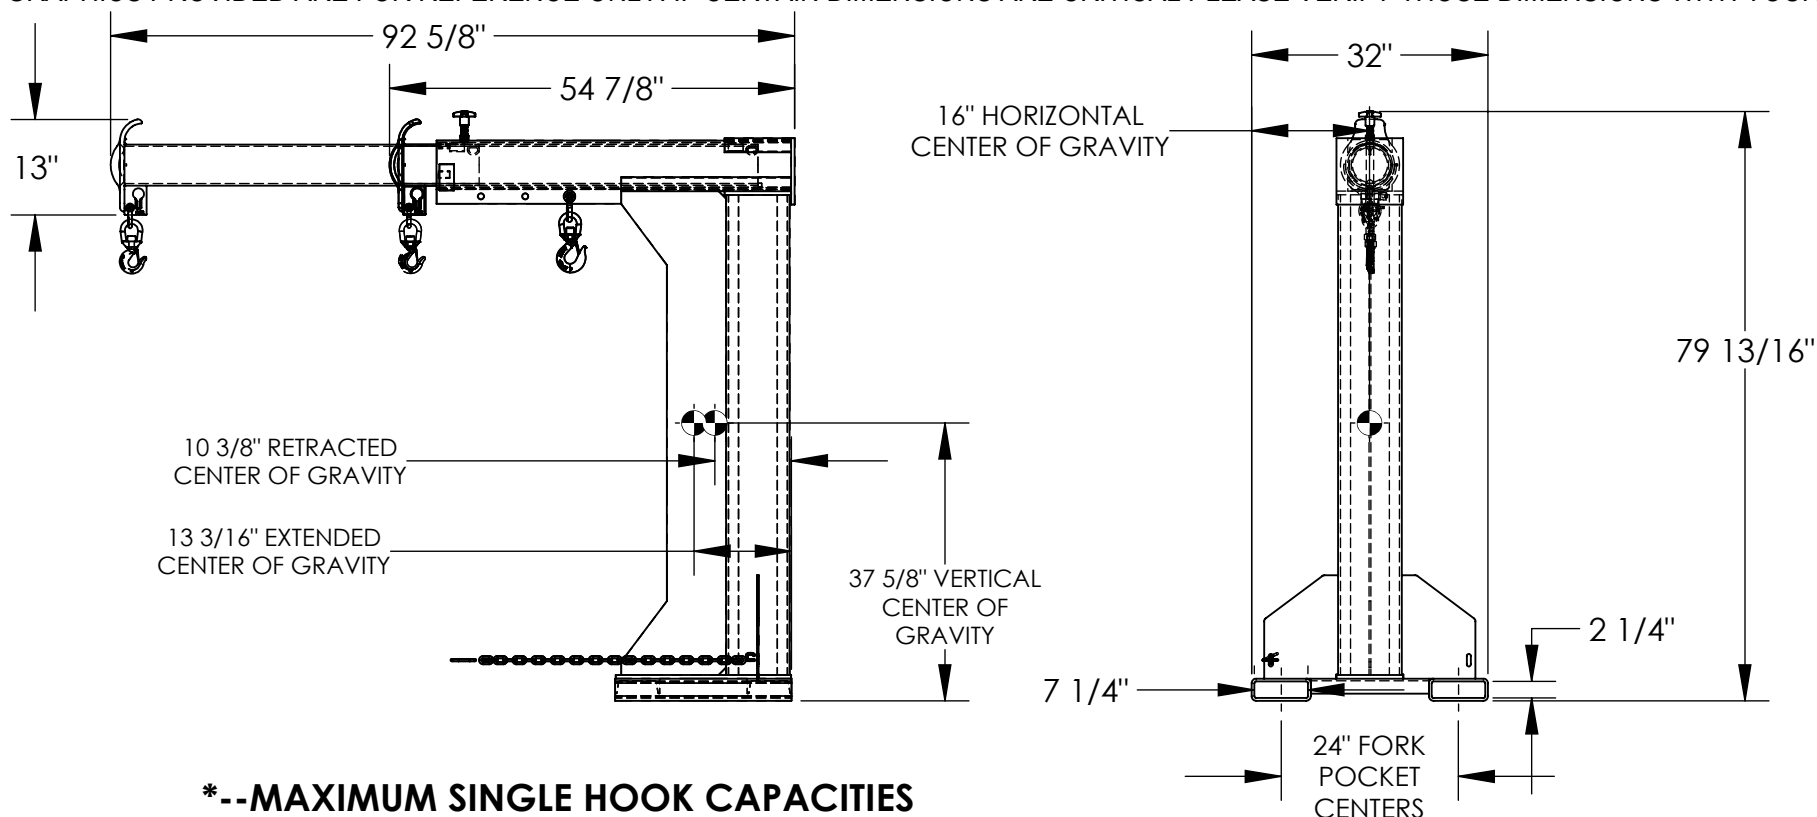

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	30"	36"	42"	48"	54"	60"	66"	72"	78"	84"	90"
CAPACITY	6000	5000	4500	4000	3500	3000	2600	2300	2000	1800	1550

STANDARD FEATURES

MODEL NUMBER: LM-HRT-6-24
 CAPACITY: 6,000 LBS
 LOST LOAD - 985 LBS
 OVERALL HEIGHT - 79 13/16"
 LENGTH (RETRACTED) - 54 7/8"
 LENGTH (EXTENDED) - 92 5/8"
 OVERALL WIDTH - 32"
 USABLE FORK POCKET - 2 1/4" X 7 1/4"
 24" FORK POCKET CENTERS
 30" MINIMUM HOOK POINT
 90" MAXIMUM HOOK POINT
 EFFECTIVE THICKNESS: LESS THAN 1"
 TOUGH BAKED IN POWDER COATED BLUE BASE FRAM
 W/ YELLOW EXTENSION

SPECIAL FEATURES

NONE

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHEMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

DIMENSION TOLERANCE ± 1/4"

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

FOR INTERNAL USE ONLY PROJECT SIGN OFF	
SALES	
ENG.	
FAB.	
POWER	

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: BCN		W.O.#
DATE: 6/7/2016		X
REFERENCE: X	SCALE: 1:30	SALES: X
QUOTED LEAD TIME: X	QUOTE #	FILE NAME:
	X	08-007-006