


# LIFT MASTER BOOM, ORBIT TELESCOPING BOOM - LM-OBT-4-30

APPROX WEIGHT: 470.51 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*  
 ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

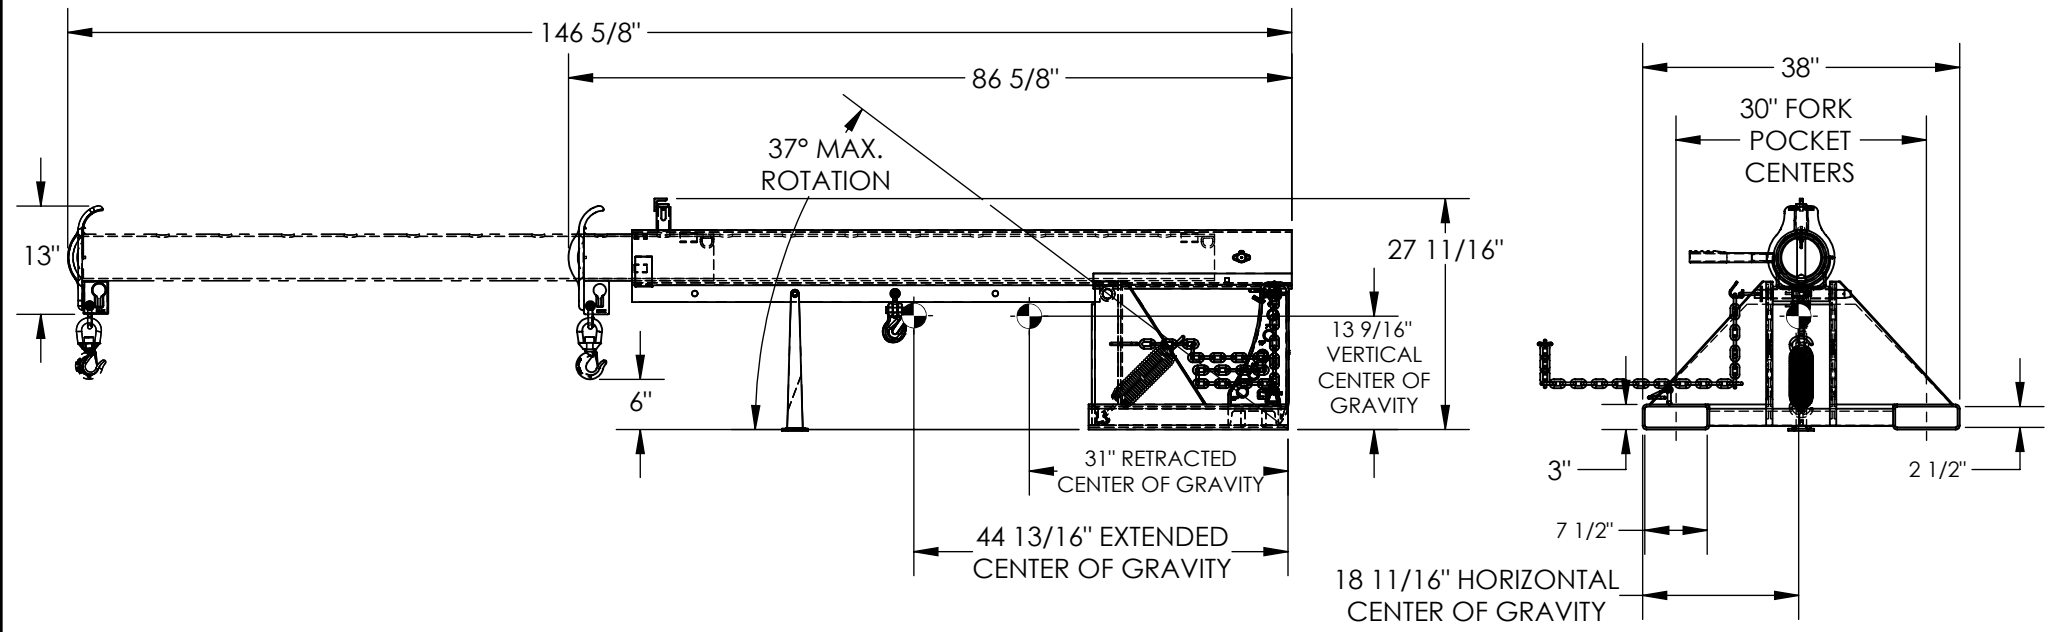

## \*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	4000	3750	3500	3250	3000	2750	2500	2250	2000	1750

DIMENSION TOLERANCE ± 1/4"

### STANDARD FEATURES

- MODEL NUMBER IS LM-OBT-4-30
- CAPACITY IS 4,000 LBS
- MAXIMUM TILT ANGLE IS 37°
- OVERALL HEIGHT - 27 11/16"
- HEIGHT (MAX TILTED) - 99 1/2"
- LENGTH RETRACTED - 86 5/8"
- LENGTH EXTENDED - 146 5/8"
- OVERALL WIDTH IS 38"
- 36" MINIMUM HOOK POINT
- 144" MAXIMUM HOOK POINT
- HOOK HEIGHT - 6"
- HOOK HEIGHT (MAX TILTED) - 78 5/16"
- USABLE FORK POCKET - 2 1/2"x7 1/2"
- 30" FORK POCKET CENTERS
- TOUGH BAKED IN POWDER COATED BLUE BASE FRAME W/ YELLOW EXTENSION

- APPROX. WEIGHT / LOST LOAD = 470.51
- MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"
- NEVER EXCEED LOAD CENTER RATING PER FORKTRUCK MANUFACTURERS GUIDELINES.
- DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING

### SPECIAL FEATURES

NONE

**APPROVAL**

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

**UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE**

[ ] As drawn [ ] As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: \_\_\_\_\_

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: B.NOTHNAGEL		DATE: 7/1/2015
REFERENCE: X		SCALE: 1:23
QUOTED LEAD TIME: X		QUOTE # X
		SALES: X
		FILE NAME: 08-007-303