
## **MECHANICAL DOCKLEVELER - RR-68-40**

APPROX WEIGHT: 2283 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

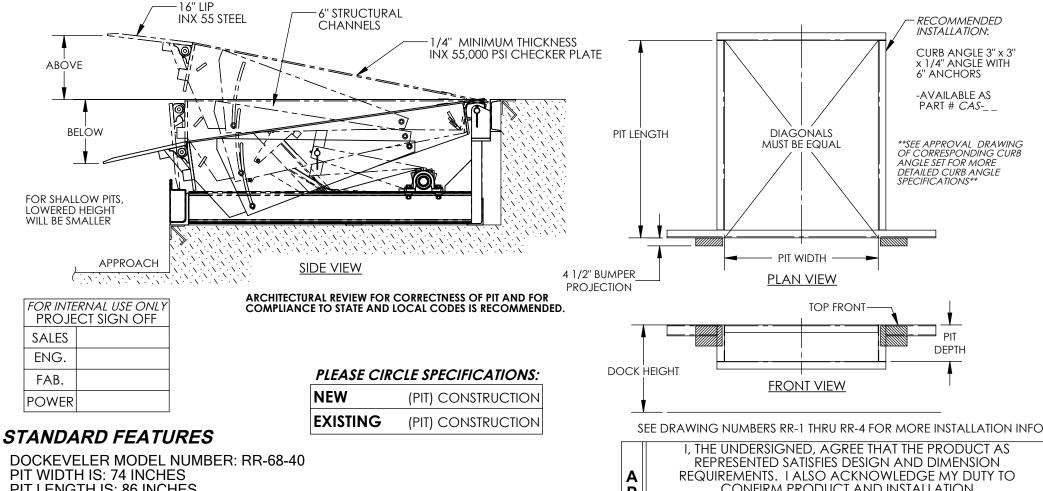

PIT LENGTH IS: 86 INCHES

PIT DEPTH IS 24 INCHES AT FRONT, 23 3/4 INCHES AT BACK

DOCK HEIGHT IS 48 INCHES (48 INCHES STANDARD)

DOCKLEVELER CAPACITY (GROSS ROLLING LOAD) IS 40,000 LBS.

VERTICAL SERVICE RANGE IS 12 INCHES ABOVE AND 12 INCHES BELOW DOCK

INCLUDES (2) 1014-4.5 LAMINATED DOCK BUMPERS

DURABLE LÌQUID PAINT BROWN FINISH WITH YELLOW DECK SIDES & TOE GUARDS

\*\*\*SINGLE AXLE CAPACITY NOT TO EXCEED 70% OF LOAD\*\*\*

ALL STRUCTURAL STEEL CONSTRUCTION WELDING MEETS AWS. DESIGN, ENGINEERING, AND FABRICATION COMPLIES WITH OSHA & ANSI MH30.1 -INSTALL TO MEET ALL APPLICABLE STATE & LOCAL CODES FOR YOUR AREA!

## SPECIAL FEATURES

NONE

	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
	REPRESENTED SATISFIES DESIGN AND DIMENSION
Α	REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
Р	CONFIRM PRODUCT AND INSTALLATION
P	COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
<u> </u>	AND LOCAL REGULATIONS AND STANDARDS.
R	ANY MODIFIED UNITS ARE NON-RETURNABLE
V	[ ] As drawn [ ] As marked
Å	Signed: Date:

	Printed Name:					
	LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWI					
	DISTRIBUTOR'S NAME:	P.O.# X				
	VESTIL MANUFAC	W.O.# v				
		X				
1	DRAWN BY: TJM	DATE: 02/	′27/12	SALES: X		
F	REFERENCE: X	,	SCALE: NTS	FILE NAME:		
C	QUOTED LEAD TIME: X	QUOTE #	1	07-007-043		

Χ