

CTD-H-TP-3000

A: Label 1153 with 770 overlay, FACING OPERATOR

MODEL / MODÉLO / MODÈLE _____
WEIGHT / PESO / MASS _____
CAPACITY / CAPACIDAD / CAPACITÉ _____
SERIAL / SERIE / SÉRIE _____
UNITS: 2.2 lb. = 1kg 1" (or 1in.) = 2.54cm 1153

B: Label 220, BOTH SIDES

⚠️ WARNING	⚠️ ADVERTENCIA	⚠️ AVERTISSEMENT
KEEP CLEAR WHEN IN USE	MANTENGASE ALEJADO CUANDO SE ESTA OPERANDO	SE TENIR À DISTANCE LORS DU FONCTIONNEMENT

220 Rev. 06/03

C: Label 821, FACING OPERATOR



⚠️ WARNING

Risk of serious injury or death.
Read and understand entire
owner's manual BEFORE using.

D: Label 208, BOTH SIDES

⚠️ WARNING	⚠️ ADVERTENCIA	⚠️ AVERTISSEMENT
KEEP CLEAR OF PINCH POINT	MANTENGASE ALEJADO DEL PUNTO DE CORTE	SE TENIR À DISTANCE DU POINT DE PINCEMENT

208 Rev. 11/11

E: Label 206, FACING OPERATOR

ISO 32 / 150 SUS


HYDRAULIC OIL OR NON-SYNTHETIC TRANSMISSION FLUID
ACEITE HIDRAULICO O LIQUIDOS DE TRANSMISION NO SINTETICOS
HUILE OU LIQUIDE HYDRAULIQUE NON-SYNTHÉTIQUE

206 Rev. 11/11

F: Label 1049, FACING OPERATOR

⚠️ WARNING

- Improper use of this fork attachment might result in death or serious injury.
- Using this front end attachment affects lift truck center of gravity.
 - Before using this fork attachment, US Federal regulation 29 CFR 1910.178 requires you to contact the manufacturer of your lift truck and request:
 - Written approval [29 CFR 1910.178(a)(4)]
 - Markings for (fork) lift truck that:
 - Identify the attachment;
 - Give approximate weight of truck and attachment at maximum elevation with laterally-centered load. [29 CFR 1910.178(a)(5)].
 - DO NOT** use UNTIL lift truck is marked with corrected capacity tags.
- 1049 rev 11/18

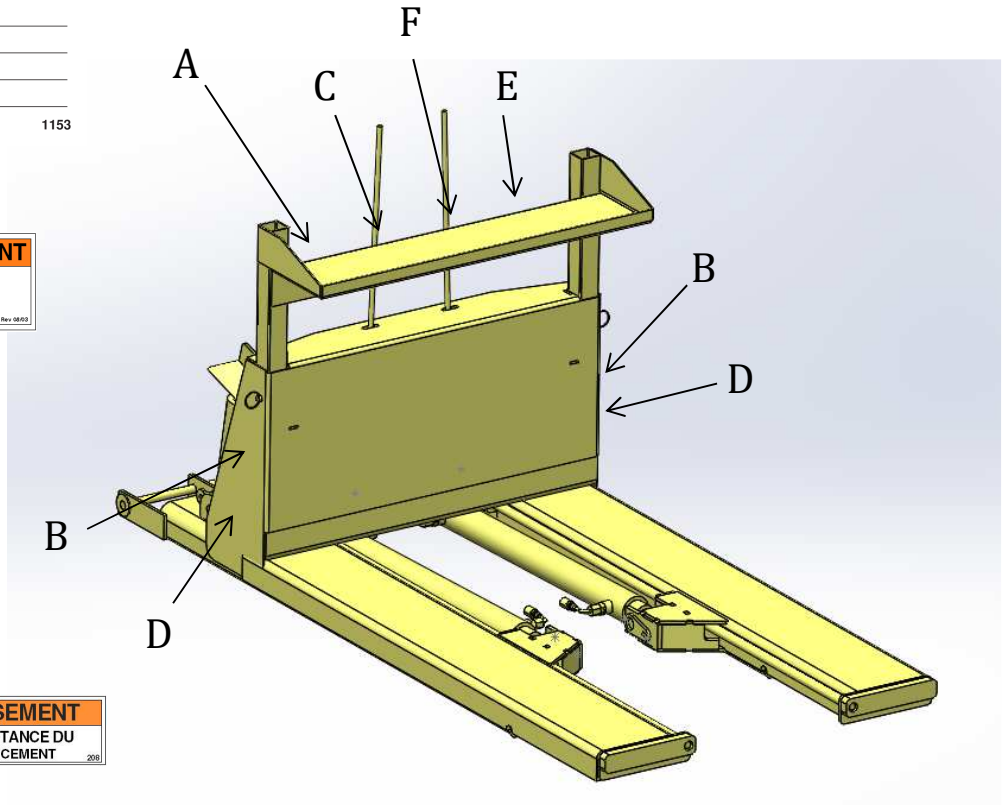

Label 1072 is to be applied to the
outside of individual packaging

⚠️ **WARNING:**
Reproductive Harm -
www.P65Warnings.ca.gov

⚠️ **WARNING:** Cancer -
www.P65Warnings.ca.gov

⚠️ **ADVERTENCIA:**
Daño Reproductivo -
www.P65Warnings.ca.gov

⚠️ **ADVERTENCIA:** Cáncer -
www.P65Warnings.ca.gov

1072

TRUCK POWERED CRATE TURNER DUMPER

3/12/2021