


DCT

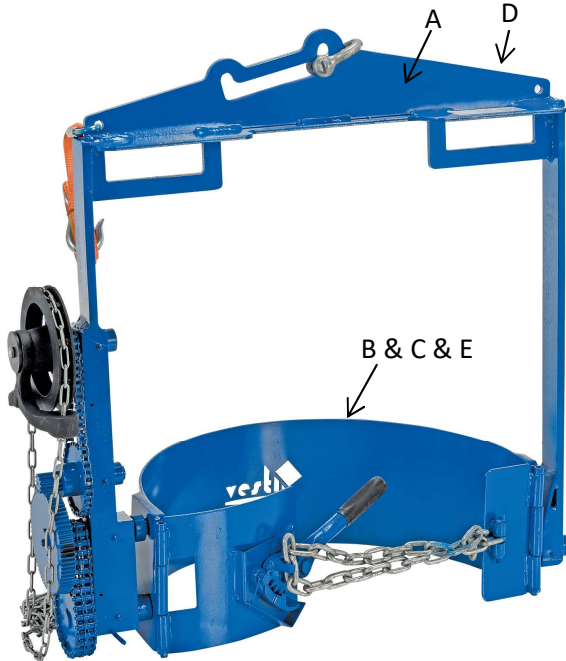

A: Label 320 – Apply to back side of cross bar or outside of drum saddle

MODEL NUMBER/NUMERO MODELO	_____
RATED LOAD	_____ LBS.
CARGA TASADA	_____ KGS.
WEIGHT OF LIFTER	_____ LBS.
PESO DE LA UNIDAD	_____ KGS.
SERIAL NUMBER/NUMERO DE SERIE:	_____
BTH-1 Design Category/Diseño BTH-1 Categoría:	<u>B</u>
BTH-1 Service Category/Servicio BTH-1 Categoría:	<u>1</u>

B: Label 1049 – (OSHA tagging requirement)
Applied to outside of drum saddle

⚠ WARNING

Improper use of this fork attachment might result in death or serious injury.

- Using this front end attachment affects lift truck center of gravity.
- Before using this fork attachment, US Federal regulation 29 CFR 1910.178 requires you to contact the manufacturer of your lift truck and request:
 - Written approval [29 CFR 1910.178(a)(4)]
 - Markings for (fork) lift truck that:
 - Identify the attachment;
 - Give approximate weight of truck and attachment at maximum elevation with laterally-centered load. [29 CFR 1910.178(a)(5)].
- DO NOT** use **UNTIL** lift truck is marked with corrected capacity tags.

1049
rev 1118

C: Label 218 – Applied to outside of drum saddle

⚠ WARNING	⚠ ADVERTENCIAS
Improper use might result in death or serious personal injury. Attach device to fork carriage with safety chain/strap. - Drive lift truck forward until forks contact ends of fork pockets - Chain/straps must not be able to disconnect (slide free) from carriage. - Safety chain/strap must be taut. Connect chain/strap to carriage via shortest line.	El uso inapropiado puede resultar en muerte o heridas personales. Atar aparato al mástil del montacargas con cadenas/correas. - Maneje el montacargas para adelante hasta que las cuñas hagan contacto con la orilla del bolsillo de las cuñas. - La cadenas y correas no deben de deslizarse (soltarse) del mástil del montacargas. - La cadena/correa de seguridad debe de estar apretado. Asegure la cadena/correa al mástil via la ruta mas corta.

218
rev 0910

D: Label 232

CAUTION	ATENCIÓN	ATTENTION
DRUM MUST BE IN VERTICAL POSITION WHEN MOVING	EL TAMBOR DEBE DE ESTAR EN LA POSICIÓN VERTICAL CUANDO EN MOVIMIENTO	LE BIDON DOIT ÊTRE EN POSITION VERTICALE LORS D'UN DÉPLACEMENT

VESTIL MANUFACTURING CORPORATION • Phone (260) 865-7588 • Fax (260) 865-1339 • sales@vestil.com • www.vestil.com

E: Label 675 – Applied to outside of drum saddle

⚠ WARNING	⚠ ADVERTENCIA
- DO NOT exceed rated capacity - DO NOT use if damaged, malfunctioning, or missing parts - DO NOT lift people OR lift loads over people - DO NOT raise load higher than necessary - DO NOT leave a suspended load unattended - DO NOT use lifter unless you read and understand the owner's manual - DO NOT alter OR modify lifter - DO NOT remove OR obscure any label - STAY CLEAR of suspended loads - Secure load before using this devise	- NO exceda la capacidad tasada - NO USE is las partes estan dañadas, no funcionan correctamente o faltan partes. - NO eleve al personal o eleve cargas sobre el personal - NO eleve la carga mas alto de lo necesario - NO deje desatendida una carga que este suspendida - NO use el elevador a no ser que haya leído y entendido las instrucciones del manual del propietario - NO altere o modifique el elevador - NO quite u oscurezca ninguna etiqueta - MANTENGASE alejado de las cargas suspendidas - Asegure la carga antes de usar este dispositivo

675
rev 0511

Label 1072 is to be applied to outside of individual packaging

⚠ WARNING:
Reproductive Harm -
www.P65Warnings.ca.gov.
⚠ WARNING: Cancer -
www.P65Warnings.ca.gov.

⚠ ADVERTENCIA:
Daño Reproductivo -
www.P65Warnings.ca.gov.
⚠ ADVERTENCIA: Cáncer -
www.P65Warnings.ca.gov.

1072

DRUM HOIST CARRIER / ROTATOR

7/26/19