EPFC-25
EPFC-25-AA
EPFC-CB-15

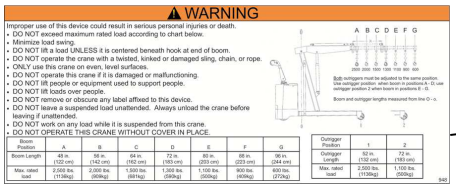

⚠ WARNING

Improper use of this device could result in serious personal injuries or death.

- DO NOT exceed maximum rated load according to chart below.
- Minimize load swing.
- DO NOT lift a load UNLESS it is centered beneath hook at end of boom.
- DO NOT operate the crane with a twisted, kinked or damaged sling, chain, or rope.
- ONLY use this crane on even, level surfaces.
- DO NOT operate this crane if it is damaged or malfunctioning.
- DO NOT lift people or equipment used to support people.
- DO NOT lift loads over people.
- DO NOT remove or obscure any label affixed to this device.
- DO NOT leave a suspended load unattended. Always unload the crane before leaving if unattended.
- DO NOT work on any load while it is suspended from this crane.
- DO NOT OPERATE THIS CRANE WITHOUT COVER IN PLACE.

Boom Position	A	B	C	D	E	F	G
Boom Length	48 in. (122 cm)	58 in. (142 cm)	64 in. (162 cm)	72 in. (183 cm)	80 in. (203 cm)	88 in. (223 cm)	96 in. (244 cm)
Max. rated load	2,500 lbs. (1134kg)	2,000 lbs. (908kg)	1,500 lbs. (681kg)	1,300 lbs. (590kg)	1,100 lbs. (500kg)	900 lbs. (408kg)	600 lbs. (270kg)

Outrigger Position	1	2
Outrigger Length	52 in. (132 cm)	72 in. (183 cm)
Max. rated load	2,500 lbs. (1134kg)	1,100 lbs. (500kg)

948

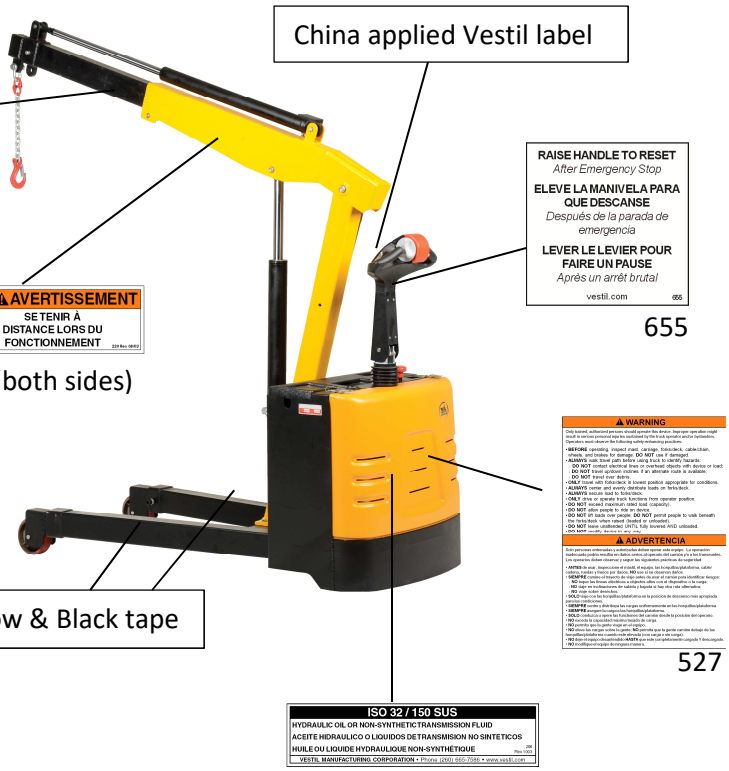

Label 1072 is to be applied to the outside of individual packaging

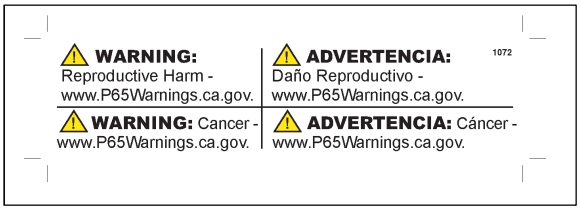

ELECTRIC POWERED FLOOR CRANE

7/2/19