


FL-4000

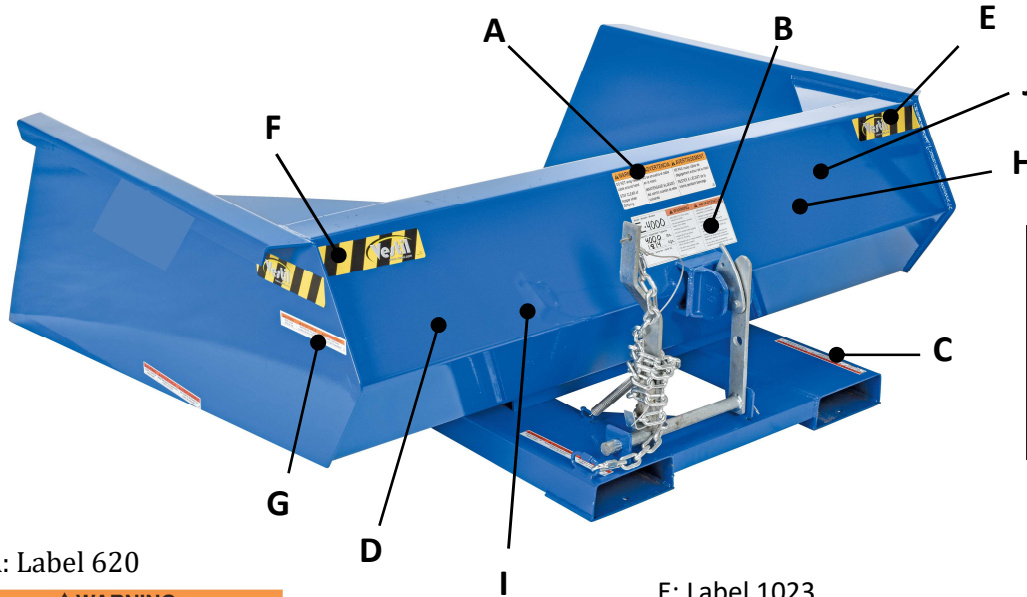

Label 1072 is to be applied to the outside of individual packaging

WARNING:
Reproductive Harm -
www.P65Warnings.ca.gov.

ADVERTENCIA:
Daño Reproductivo -
www.P65Warnings.ca.gov.

WARNING: Cancer -
www.P65Warnings.ca.gov.

ADVERTENCIA: Cáncer -
www.P65Warnings.ca.gov.

A: Label 620

WARNING



DO NOT wrap release cable around hand.
Severe injury or amputation might occur if cable wrapped around body part when chute dumped.

STAY CLEAR of hopper when dumping.

DO NOT hook manual release handle on hopper when using bumper release.
Each person who uses this hopper should have access to the user manual. Copies of the manual can be downloaded from www.vestil.com.

ADVERTENCIA

NO AGARRAR el cable con la mano.

Puede causar un daño severo o amputación si el cable se envuelve alrededor del cuerpo al estar descargando la tolva.

MANTENTE ALEJADO de la tolva al descargar. Nunca agarrar el gancho de la tolva.

Cada persona que use la tolva debe de usar el manual, las copias se pueden descargar de la dirección www.vestil.com.

620
REV 1/11

E: Label 1023



F: Label 1037



G: Label 220 (both sides)

WARNING
KEEP CLEAR
WHEN IN USE

ADVERTENCIA
MANTENGASE
ALEJADO CUANDO SE
ESTA OPERANDO

AVERTISSEMENT
SE TENIR À
DISTANCE LORS DU
FONCTIONNEMENT

220 MAX 04/03

H: Label 1210

WARNING

Using this front end attachment exposes occupants and bystanders to risk of serious personal injuries or death.

1210

- **DO NOT** use this front end attachment with rough terrain lift trucks or telehandlers (boom lifts).
- **ONLY** use this attachment with high lift fork trucks utilizing a vertical mast and carriage.
- **DO NOT** operate truck with attachment on unimproved surfaces. **ONLY** operate the truck with the attachment on concrete or asphalt surfaces capable of supporting the truck and a full capacity load.

B: Label 549

Model / Modelo / Modèle	WARNING	ADVERTENCIA
Capacity / Capacidad / Capacité lbs. kgs.	• SECURELY ATTACH safety restraint to forklift. • Tilt load backwards to prevent hopper from sliding. • Distribute load evenly. • DO NOT exceed rated capacity. • Hopper MUST be locked when not dumping. • Disengage lock on hopper release before dumping hopper. • DO NOT wrap release cable around any body part.	• ASEGURE la cadena de seguridad a la transpaleta. • Vuelque la carga hacia atrás para prevenir que el carrito resbale. • Distribuya la carga uniformemente. • NO exceda la capacidad de carga tasada. • El depósito de alimentación debe ser cerrado al no descargar. • Suelte cerradura en la liberación de depósito de alimentación antes de descargar depósito de alimentación. • No envuelva cable de liberación alrededor de cualquier parte del cuerpo.
Serial No. / Serie No. / Série No.		

549 REV 1/11

I: Label 1153 with 770 overlay

MODEL / MODÉLO / MODÈLE _____
WEIGHT / PESO / MASS _____
CAPACITY / CAPACIDAD / CAPACITÉ _____
SERIAL / SERIE / SÉRIE _____
UNITS: 2.2 lb. = 1kg 1" (or 1in.) = 2.54cm 1153

C: Label 208 (both fork tubes)

WARNING	ADVERTENCIA	AVERTISSEMENT
KEEP CLEAR OF PINCH POINT	MANTENGASE ALEJADO DEL PUNTO DE CORTE	SE TENIR À DISTANCE DU POINT DE PINCEMENT

208

D: Label 995

WARNING	ADVERTENCIA
DO NOT use this product to lift or transport people.	NO use este producto para transportar o elevar personas.

J: Label 1049

WARNING

- Improper use of this fork attachment might result in death or serious injury.
- Using this front end attachment affects lift truck center of gravity.
- Before using this fork attachment, US Federal regulation 29 CFR 1910.178 requires you to contact the manufacturer of your lift truck and request:
 1. Written approval [29 CFR 1910.178(a)(4)]
 2. Markings for (fork) lift truck that:
 - Identify the attachment;
 - Give approximate weight of truck and attachment at maximum elevation with laterally-centered load. [29 CFR 1910.178(a)(5)].
- DO NOT** use UNTIL lift truck is marked with corrected capacity tags.
- CAPACITY OF TRUCK & ATTACHMENT COMBINATION MIGHT BE LESS THAN CAPACITY OF ATTACHMENT. CONSULT TRUCK CAPACITY TAG/LABEL.

1049
REV 1/20

FORK MOUNTED FRONT LOADER

10/09/2024