


FLB

⚠️ WARNING	⚠️ ADVERTENCIA
- DO NOT exceed rated capacity - DO NOT use if damaged, malfunctioning, or missing parts - DO NOT lift people OR lift loads over people - DO NOT raise load higher than necessary - DO NOT leave a suspended load unattended - DO NOT use lifter unless you read and understand the owner's manual - DO NOT alter OR modify lifter - DO NOT remove OR obscure any label - STAY CLEAR of suspended loads - Secure load before using this device	- NO exceda la capacidad tasada - NO USE si las partes estan dañadas, no funcionan correctamente o faltan partes - NO eleve al personal o eleve cargas sobre el personal - NO eleve la carga mas alto de lo necesario - NO deje desatendida una carga que este suspendida - NO use el elevador a no ser que haya leído y entendido las instrucciones del manual del propietario - NO altere o modifique el elevador - NO quite u oscurezca ninguna etiqueta - MANTENGASE alejado de las cargas suspendidas - Asegure la carga antes de usar este dispositivo

675

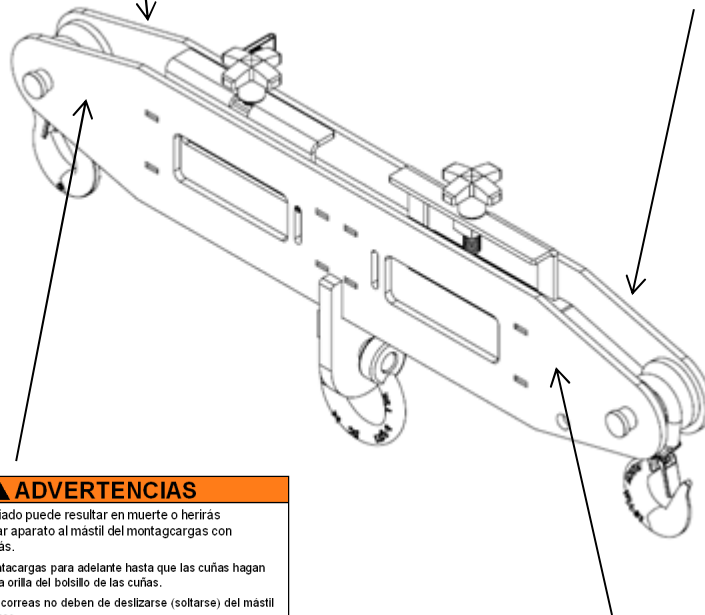

⚠️ WARNING

Improper use of this fork attachment might result in death or serious injury.

- Using this front end attachment affects lift truck center of gravity.
- Before using this fork attachment, US Federal regulation 29 CFR 1910.178 requires you to contact the manufacturer of your lift truck and request:
 - Written approval [29 CFR 1910.178(a)(4)]
 - Markings for (fork) lift truck that:
 - Identify the attachment;
 - Give approximate weight of truck and attachment at maximum elevation with laterally-centered load. [29 CFR 1910.178(a)(5)].
- DO NOT use UNTIL** lift truck is marked with corrected capacity tags.

1049

⚠️ WARNING	⚠️ ADVERTENCIAS
Improper use might result in death or serious personal injury. Attach device to fork carriage with safety chain/strap. - Drive lift truck forward until forks contact ends of fork pockets - Chain/straps must not be able to disconnect (slide free) from carriage. - Safety chain/strap must be taut. Connect chain/strap to carriage via shortest line.	El uso impropio puede resultar en muerte o heridas personales. Atar aparato al mástil del montacargas con cadenas/correas. - Maneje el montacargas para adelante hasta que las cuñas hagan contacto con la orilla del bolsillo de las cuñas. - La cadenas y correas no deben deslizarse (soltarse) del mástil del montacargas. - La cadena/correa de seguridad debe de estar apretado. Asegure la cadena/correa al mástil via la ruta mas corta.

218

Model No./ No. Modelo: FLB-D-10	Serial No. / No. Serie: _____
Capacity: 10,000 lbs.	Lifter Weight: 84 lbs.
Capacidad: 4535 kg.	Peso del Elevador: 38 kg.
BTH-1 Design Category: B BTH-1 Categoría de Diseño B	BTH-1 Service Category: 1 BTH-1 Categoría de Servicio: 1
Read Owners Manual for product safety warnings Lea Manual de Propietarios para advertencias de seguridad de producto	

1251

Label 1072 is to be applied to the outside of individual packaging

⚠️ WARNING: Reproductive Harm - www.P65Warnings.ca.gov. ⚠️ WARNING: Cancer - www.P65Warnings.ca.gov.	⚠️ ADVERTENCIA: Daño Reproductivo - www.P65Warnings.ca.gov. ⚠️ ADVERTENCIA: Cáncer - www.P65Warnings.ca.gov.
--	--

FORKLIFT LIFTING BEAM

05/22/2025