

FLDM

⚠ WARNING

- Improper use of this fork attachment might result in death or serious injury. **1049**
rev 1220
- Using this front end attachment affects lift truck center of gravity.
 - Before using this fork attachment, US Federal regulation 29 CFR 1910.178 requires you to contact the manufacturer of your lift truck and request:
 1. Written approval [29 CFR 1910.178(a)(4)]
 2. Markings for (fork) lift truck that:
 - Identify the attachment;
 - Give approximate weight of truck and attachment at maximum elevation with laterally-centered load. [29 CFR 1910.178(a)(5)].
 - **DO NOT** use **UNTIL** lift truck is marked with corrected capacity tags.
 - **CAPACITY OF TRUCK & ATTACHMENT COMBINATION MIGHT BE LESS THAN CAPACITY OF ATTACHMENT. CONSULT TRUCK CAPACITY TAG/LABEL.**

1049

⚠ WARNING


Using this front end attachment exposes occupants and bystanders to risk of serious personal injuries or death. **1210**

- **DO NOT** use this front end attachment with rough terrain lift trucks or telehandlers (boom lifts).
- **ONLY** use this attachment with high lift fork trucks utilizing a vertical mast and carriage.
- **DO NOT** operate truck with attachment on unimproved surfaces. **ONLY** operate the truck with the attachment on concrete or asphalt surfaces capable of supporting the truck and a full capacity load.

1210

⚠ WARNING	⚠ ADVERTENCIAS
Improper use might result in death or serious personal injury. Attach device to fork carriage with safety chain/strap. • Drive lift truck forward until forks contact ends of fork pockets • Chain/straps must not be able to disconnect (slide free) from carriage. • Safety chain/strap must be taut. Connect chain/strap to carriage via shortest line.	El uso inapropiado puede resultar en muerte o heridas personales. Atar aparato al mástil del montacargas con cadenas/correas. • Maneje el montacargas para adelante hasta que las cuñas hagan contacto con la orilla del bolsillo de las cuñas. • La cadenas y correas no deben de deslizarse (soltarse) del mástil del montacargas. • La cadena/correa de seguridad debe de estar apretado. Asegure la cadena/correa al mástil vía la ruta mas corta.

218

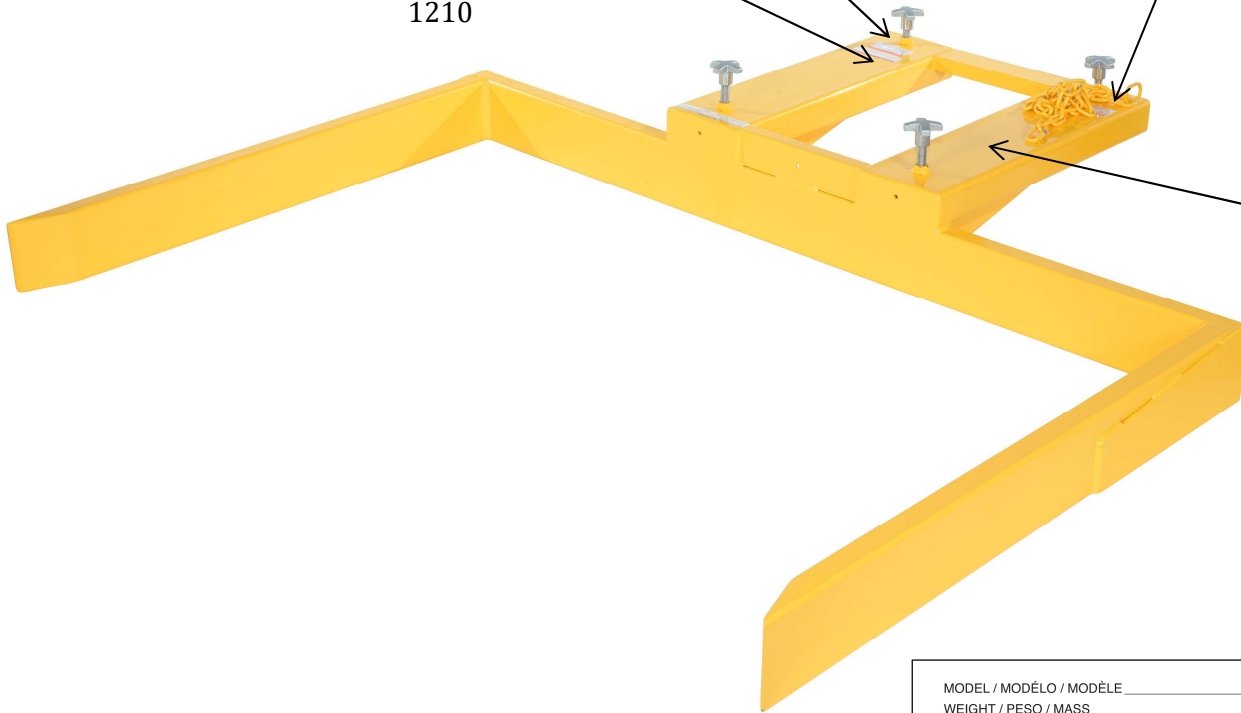

Label 1072 is to be applied to the outside of individual packaging

- | | |
|--|--|
| ⚠ WARNING:
Reproductive Harm -
www.P65Warnings.ca.gov | ⚠ ADVERTENCIA:
Daño Reproductivo -
www.P65Warnings.ca.gov |
| ⚠ WARNING: Cancer -
www.P65Warnings.ca.gov | ⚠ ADVERTENCIA: Cáncer -
www.P65Warnings.ca.gov |

MODEL / MODÉLO / MODÈLE _____
WEIGHT / PESO / MASS _____
CAPACITY / CAPACIDAD / CAPACITÉ _____
SERIAL / SERIE / SÉRIE _____
UNITS: 2.2 lb. = 1kg 1" (or 1in.) = 2.54cm **1153**

1153 with 770 overlay

FRONT LOAD DUMPSTER MOVER

05/10/24