


HOOK-BASE

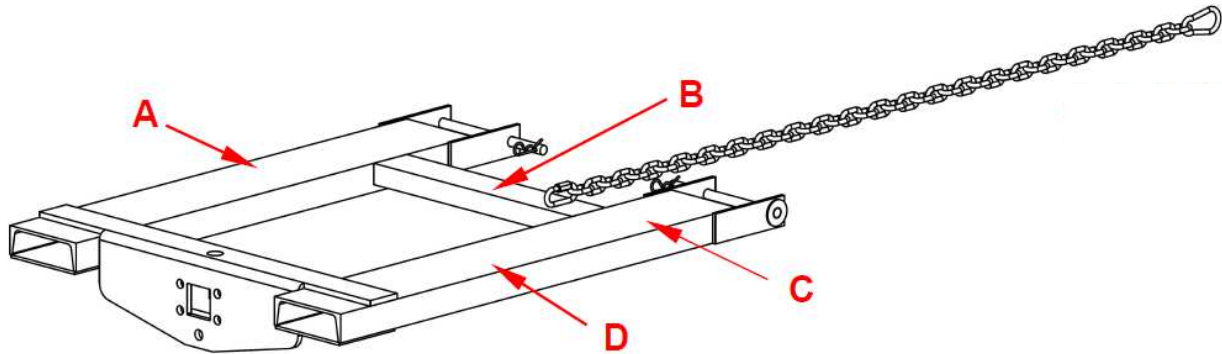

A: Label 1049

⚠ WARNING

Improper use of this fork attachment might result in death or serious injury.

- Using this front end attachment affects lift truck center of gravity.
- Before using this fork attachment, US Federal regulation 29 CFR 1910.178 requires you to contact the manufacturer of your lift truck and request:
 - Written approval [29 CFR 1910.178(a)(4)]
 - Markings for (fork) lift truck that:
 - Identify the attachment;
 - Give approximate weight of truck and attachment at maximum elevation with laterally-centered load. [29 CFR 1910.178(a)(5)].
- DO NOT** use **UNTIL** lift truck is marked with corrected capacity tags.

1049
rev 1118

B: Label 1153 with 770

MODEL / MODÉLO / MODÈLE _____
 WEIGHT / PESO / MASS _____
 CAPACITY / CAPACIDAD / CAPACITÉ _____
 SERIAL / SERIE / SÉRIE _____

UNITS: 2.2 lb. = 1kg

1" (or 1in.) = 2.54cm

1153

D: Label 658

⚠ WARNING

Do not operate or move with unstable loads
 Do not load beyond rated capacity
 Distribute load evenly
 Do not sit or ride

⚠ ADVERTENCIA

No opere ni se mueva con cargas inestables
 No cargue más allá de la capacidad nominal
 Distribuya la carga de manera uniforme
 No te sientes ni conduzcas

⚠ AVERTISSEMENT

Ne pas utiliser ou déplacer avec des charges instables
 Ne pas charger au-delà de la capacité nominale
 Répartir la charge uniformément
 Ne vous asseyez pas et ne montez pas

658 rev 0721

C: Label 218

⚠ WARNING

Improper use might result in death or serious personal injury. Attach device to fork carriage with safety chain/strap.

- Drive lift truck forward until forks contact ends of fork pockets
- Chain/straps must not be able to disconnect (slide free) from carriage.
- Safety chain/strap must be taut. Connect chain/strap to carriage via shortest line.

⚠ ADVERTENCIAS

El uso inapropiado puede resultar en muerte o heridas personales. Atar aparato al mástil del montacargas con cadenas/correas.

- Maneje el montacargas para adelante hasta que las cuñas hagan contacto con la orilla del bolsillo de las cuñas.
- La cadenas y correas no deben de deslizarse (soltarse) del mástil del montacargas.
- La cadena/correa de seguridad debe de estar apretado. Asegure la cadena/correa al mástil vía la ruta mas corta.

218
rev 0910

Label 1072 is to be applied to the outside of individual packaging

⚠ **WARNING:**
 Reproductive Harm -
www.P65Warnings.ca.gov.

⚠ **ADVERTENCIA:**
 Daño Reproductivo -
www.P65Warnings.ca.gov.

1072

⚠ **WARNING:** Cancer -
www.P65Warnings.ca.gov.

⚠ **ADVERTENCIA:** Cáncer -
www.P65Warnings.ca.gov.

FORKTRUCK TOW BALL BASE ATTACHMENT

8/11/2021