

TCD-M/U

A: Label 725, both sides of chute

⚠ WARNING

This machine has a drum chute that elevates and pivots. The operator and/or bystanders might sustain serious personal injuries if the drum dumper is improperly used. Reduce the likelihood of injury by conforming use to the following recommendations:

- DO NOT exceed maximum rated load.
- DO NOT operate dumper unless BOTH rim clamps securely engage drum.
- DO NOT lift people with chute or allow people to ride on chute. DO NOT pass beneath or stand under chute when raised or tilted or allow others to do so.
- DO NOT leave elevated or tilted drum unattended. Immediately after dumping drum, return chute to vertical position, fully lower it, and remove dumped drum.
- DO NOT modify machine in any way. Modifications may cause malfunctions and might make dumper unsafe to use.
- Instruct all people to clear area BEFORE operating dumper.
- DO NOT load or operate dumper UNLESS securely attached to floor.

C: Label 220, side guard, both sides

⚠ WARNING	⚠ ADVERTENCIA	⚠ AVERTISSEMENT
KEEP CLEAR WHEN IN USE	MANTENGASE ALEJADO CUANDO SE ESTA OPERANDO	SE TENIR À DISTANCE LORS DU FONCTIONNEMENT

E: Label 1153 w/770 overlay



MODEL / MODELO / MODÈLE	
WEIGHT / PESO / MASS	
CAPACITY / CAPACIDAD / CAPACITÉ	
SERIAL / SERIE / SÉRIE	
UNITS: 2.2 lb. = 1kg	1" (or 1in.) = 2.54cm
1153	

B: Label 208, side guard, both sides

⚠ WARNING	⚠ ADVERTENCIA	⚠ AVERTISSEMENT
KEEP CLEAR OF PINCH POINT	MANTENGASE ALEJADO DEL PUNTO DE CORTE	SE TENIR À DISTANCE DU POINT DE PINCEMENT

D: Label 212, both sides

⚠ WARNING	⚠ ADVERTENCIA	⚠ AVERTISSEMENT
Immobilize by applying all caster brakes and/or floor locks when in use, loading, and unloading.	Inmovilice aplicando todos los frenos de las ruedas y / o bloqueos del piso cuando esté en uso, cargando y descargando.	Immobiliser en appliquant tous les freins des roulettes et / ou les verrous de plancher lors de l'utilisation, du chargement et du déchargement.

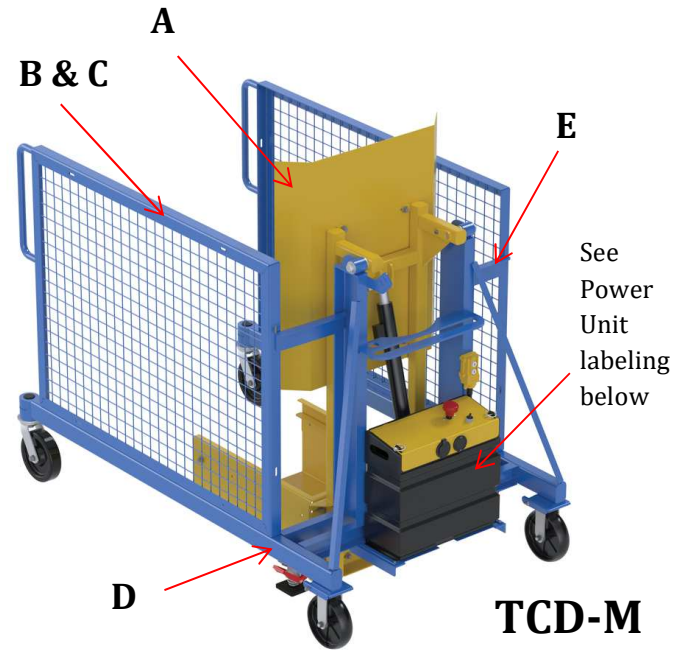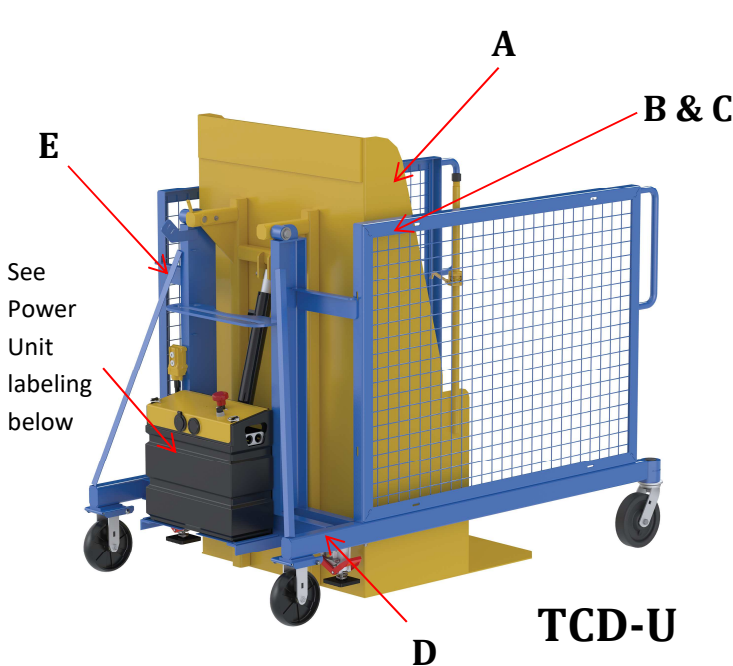

DC UNITS, Modular Power Unit Labeling

A or B: Label 1075 (units with powered lift)

C: Label 1079 (all units)

D: Label 1080 (all units)

Label 206 (all units; applied to reservoir inside power unit housing): Hydraulic oil specifications

Label 295 (all units; applied to outside of power unit housing): Battery handling hazards

⚠ WARNING

Exhausted battery contains hazardous chemicals. DO NOT handle exhausted battery UNLESS wearing full protection and other appropriate personal protective equipment. DO NOT directly contact skin with battery. DO NOT expose to sparks or extreme heat. Battery contains gases. **⚠ ADVERTENCIA**

La batería contiene materiales peligrosos. NO use la batería exhausta A NO SER que tenga protección adecuada y otros equipos de protección apropiados para el personal. NO toque contacto directo con la piel con la batería. NO exponga a chispas o a calor extremo. La batería contiene gases.

AC UNITS, Modular Power Unit Labeling

A or B: Label 1077 (units with powered lift function)

C: Label 1081 (all AC-powered units)

Label 248-251 (all units; applied to front and back of metal frame):

NOTICE / NOTA / AVIS

248: 115V AC, Single-Phase, 60Hz
249: 208-230V AC, 3-Phase, 60Hz
250: 460V AC, 3-Phase, 60Hz
251: 208-230V AC, Single-Phase, 60Hz

Label 1072 is to be applied to the outside of individual packaging

⚠ WARNING: Reproductive Harm - www.P65Warnings.ca.gov	⚠ ADVERTENCIA: Daño Reproductivo - www.P65Warnings.ca.gov
⚠ WARNING: Cancer - www.P65Warnings.ca.gov	⚠ ADVERTENCIA: Cáncer - www.P65Warnings.ca.gov

TRASH CAN DUMPER

04/09/2025