


Inquiry Date: \_\_\_\_\_ Due Date: \_\_\_\_\_  
**Contact:** \_\_\_\_\_  
**Company:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_  
**Fax:** \_\_\_\_\_  
**E-mail:** \_\_\_\_\_

## Scissors Lift Table Survey Sheet

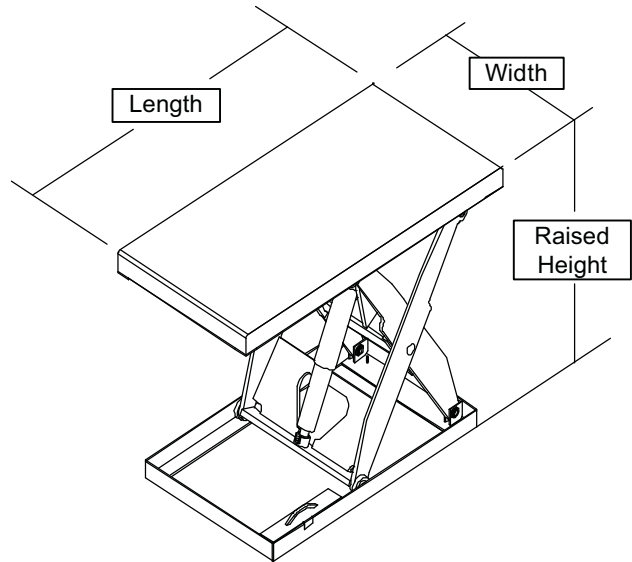

### PLATFORM SIZE

Not Critical

Overall Width: \_\_\_\_\_  
Overall Length: \_\_\_\_\_  
Usable Width: \_\_\_\_\_  
Usable Length: \_\_\_\_\_

### BASE WIDTH

Width: \_\_\_\_\_  
Length: \_\_\_\_\_  
Lowered Ht.: \_\_\_\_\_  
Raised Ht.: \_\_\_\_\_  
Travel: \_\_\_\_\_  
Table Cap.: \_\_\_\_\_

\*Internal power unit standard on most models.  
External Power units available

### POWER (Check One)

\_\_\_\_ A/C (110V \_\_\_\_ 220V \_\_\_\_ 460V \_\_\_\_ Other \_\_\_\_)  
\_\_\_\_ Single Phase \_\_\_\_ Three Phase  
\_\_\_\_ Air / Hydraulic  
\_\_\_\_ Reciprication Air / Oil \_\_\_\_ Rotary Air/Oil  
\_\_\_\_ Foot Pump  
\_\_\_\_ None with Toeguards & Limit Switches  
\_\_\_\_ None with no electrical switches  
Controls: HAND \_\_\_\_ FOOT \_\_\_\_ NONE \_\_\_\_)  
Power Unit: EXTERNAL \_\_\_\_ INTERNAL \_\_\_\_  
IF External - Length on Cords (8' STD) \_\_\_\_\_

### PRODUCT INFORMATION

Container / Product type:  
Basket / Pallet / Gaylord  
Other: \_\_\_\_\_



Product Size: \_\_\_\_\_

### Options:

\_\_\_\_ Handrails \_\_\_\_ Handrails w/ Toeboards size \_\_\_\_  
\_\_\_\_ Bridge plate \_\_\_\_ Bridge plate w/ curbs size \_\_\_\_  
Special Color \_\_\_\_  
List color \_\_\_\_

\_\_\_\_ Roller Conveyor  
\_\_\_\_ Set High  
\_\_\_\_ Set Low

Conveyor size:  
\_\_\_\_ Overall Width  
\_\_\_\_ Between Frames  
\_\_\_\_ Overall Length  
\_\_\_\_ Roller Center  
\_\_\_\_ Roller Size

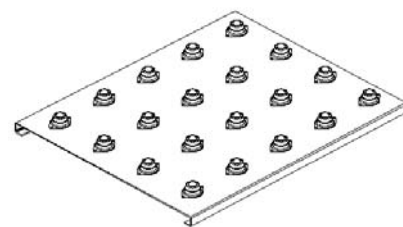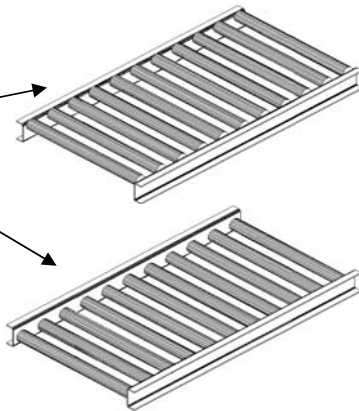

\_\_\_\_ Ball Transfer  
\_\_\_\_ Overall Width  
\_\_\_\_ Overall Length  
\_\_\_\_ Ball Centers

If no conveyor is specified, we will quote our standard medium duty, 1.9" dia. on 3" center, set high in frame.

Note: It is the customers responsibility to assure that their load will work on the conveyor or ball transfer quoted. If no prduct size, type or application is provided the customer assumes the liability of using the conveyor or ball trasfer tops.

Ball transfer not recommended for loads greater than 2,000 lbs.  
Recommended for smooth bottom containers only.

\*All options may not be available on all models

Vestil Manufacturing Company \* Angola, IN 46703 \* Ph- 260-665-7586 \* Fx- 260-665-1339