


STEEL HYDRAULIC MACHINERY TOE JACKS

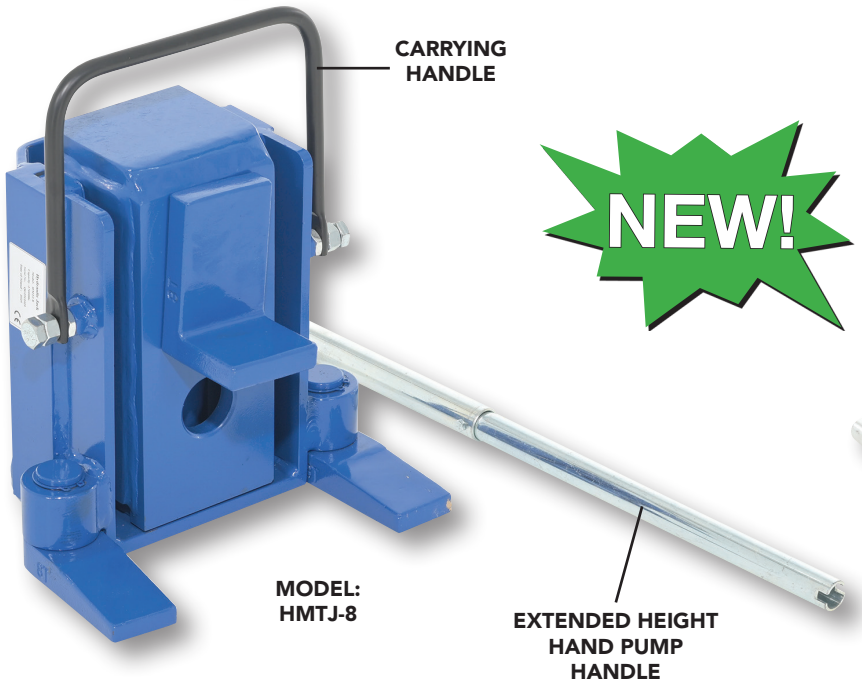

NEW!

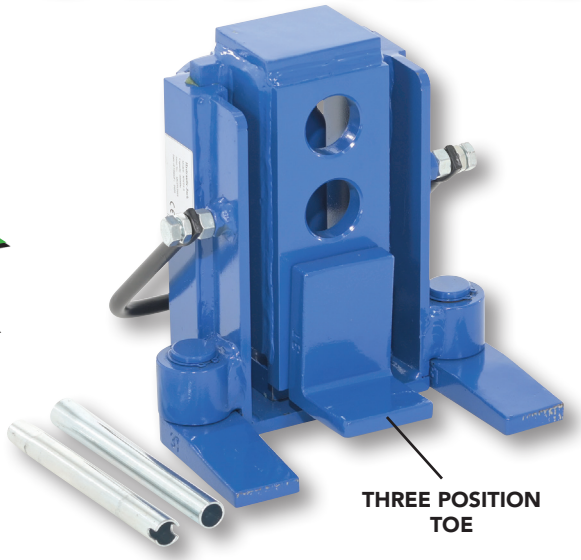

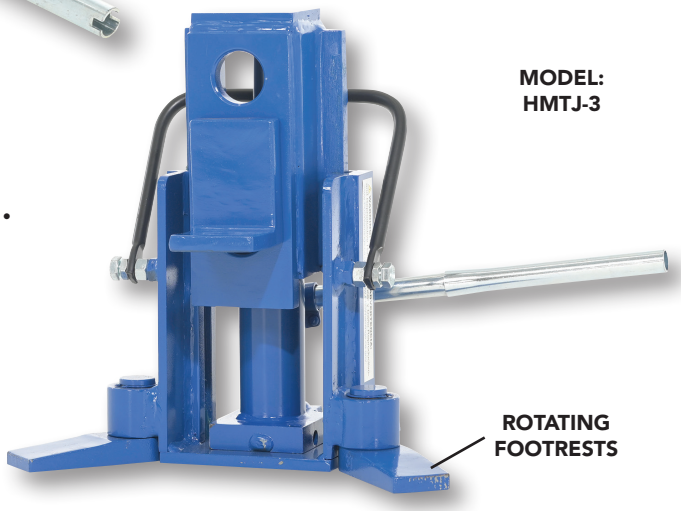

Standard Features:

- **Both jack head and toe can be used for lifting.**
- **Built-in overload protection.**
- **Three position adjustable toe.**
- **Rotating footrests.**
- **Included extended height handle.**
- **Rugged steel construction.**
- **Durable blue powder coat finish.**

MODEL NUMBER	OVERALL DIMENSIONS (W x L x H)	TOE HEIGHT SERVICE RANGE	HEAD SERVICE RANGE	CAPACITY	WEIGHT (LB)
HMTJ-3	9¾" x 9⅜" x 9⅝"	⅝" - 5½"	9½" - 15⅜"	6,600 lbs	50
HMTJ-8	10⅝" x 10" x 10½"	13/16" - 5½"	9⅞" - 17"	17,600 lbs	65

Designed for industrial machinery, equipment positioning, and field or warehouse use, these hand-pump jacks allow a load to be raised from either the low-profile toe or the upper jack head.

Vestil We've Got It!

Vestil Manufacturing Corporation

2999 North Wayne Street, P.O. Box 507
Angola, Indiana 46703, USA
Phone: (260) 665-7586 Fax: (260) 665-1339
E-Mail: info@vestil.com Web: www.vestil.com