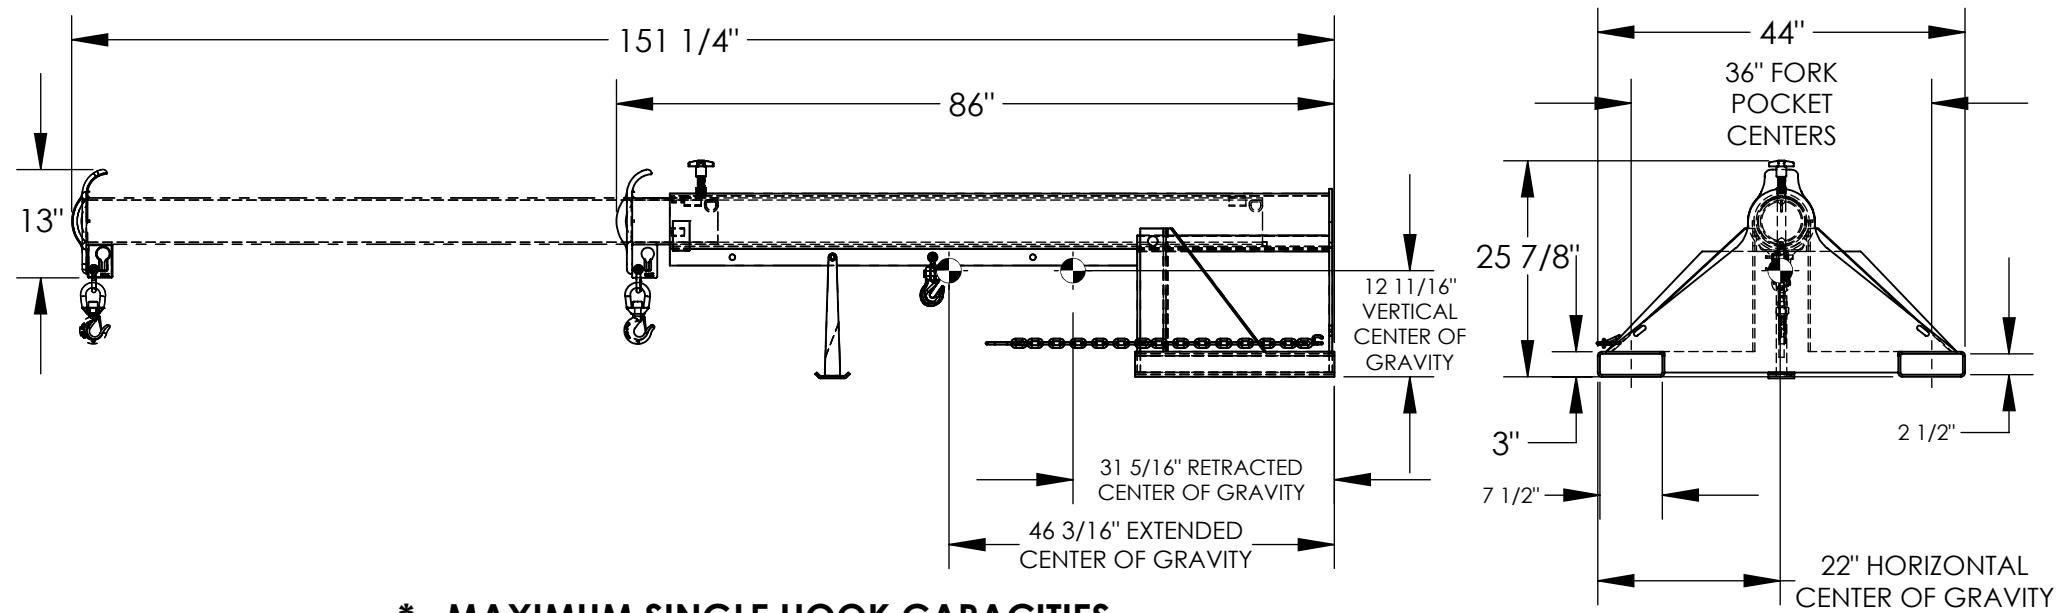# LIFT MASTER BOOM, LIFT MASTER ONE, TELESCOPING BOOM - LM-1T-4-36

APPROX WEIGHT: 470.34 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

151 1/4"
86"
13"
12 11/16" VERTICAL CENTER OF GRAVITY
31 5/16" RETRACTED CENTER OF GRAVITY
46 3/16" EXTENDED CENTER OF GRAVITY

44"
36" FORK POCKET CENTERS
25 7/8"
3"
7 1/2"
2 1/2"
22" HORIZONTAL CENTER OF GRAVITY

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	4000	3750	3500	3250	3000	2750	2500	2250	2000	1750

STANDARD FEATURES

MODEL NUMBER: LM-1T-4-36
CAPACITY: 4,000 LBS
LOST LOAD - 475 LBS
OVERALL HEIGHT - 25 7/8"
LENGTH (RETRACTED) - 86"
LENGTH (EXTENDED) - 151 1/4"
OVERALL WIDTH - 44"
USABLE FORK POCKET - 2 1/2" X 7 1/2"
36" FORK POCKET CENTERS
36" MINIMUM HOOK POINT
144" MAXIMUM HOOK POINT
EFFECTIVE THICKNESS: LESS THAN 1"
TOUGH BAKED IN POWDER COATED
      BLUE BASE FRAME W/ YELLOW EXTENSION

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES.
DO NOT USE THIS FORK TRUCK ATTACHEMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE ± 1/4"

DISTRIBUTOR'S NAME:		P.O.# X
VESTIL MANUFACTURING		W.O.# X
DRAWN BY: BCN	DATE: 6/1/2016	SALES: X
REFERENCE: X		FILE NAME:
QUOTED LEAD TIME: X	QUOTE # X	08-007-203

SCALE: 1:23