
MECHANICAL DOCKLEVELER - RR-610-25

APPROX WEIGHT: 2514 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

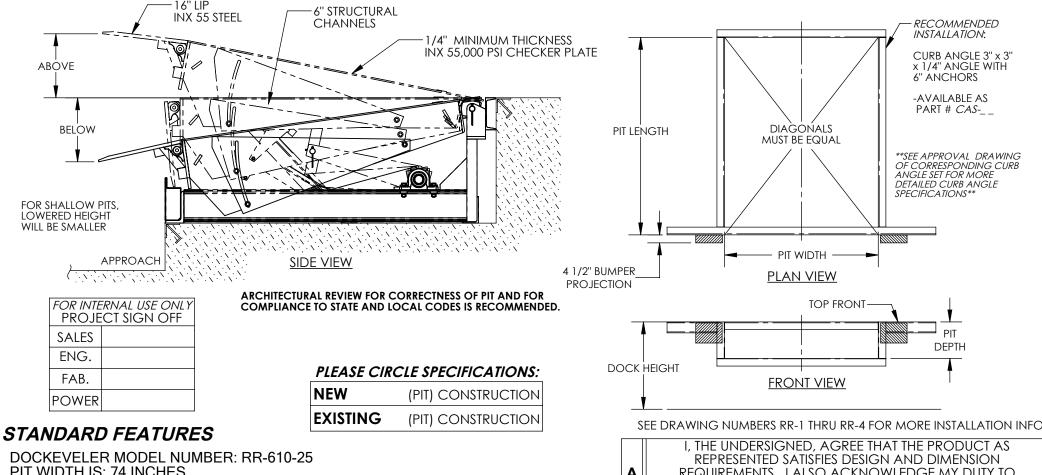

PIT WIDTH IS: 74 INCHES PIT LENGTH IS: 110 INCHES

PIT DEPTH IS 24 INCHES AT FRONT, 23 3/4 INCHES AT BACK

DOCK HEIGHT IS 48 INCHES (48 INCHES STANDARD)

DOCKLEVELER CAPACITY (GROSS ROLLING LOAD) IS 25,000 LBS.

VERTICAL SERVICE RANGE IS 12 INCHES ABOVE AND 12 INCHES BELOW DOCK

INCLUDES (2) 1014-4.5 LAMINATED DOCK BUMPERS

DURABLE LÌQUID PAINT BROWN FINISH WITH YELLOW DECK SIDES & TOE GUARDS

SINGLE AXLE CAPACITY NOT TO EXCEED 70% OF LOAD

ALL STRUCTURAL STEEL CONSTRUCTION WELDING MEETS AWS. DESIGN, ENGINEERING, AND FABRICATION COMPLIES WITH OSHA & ANSI MH30.1 -INSTALL TO MEET ALL APPLICABLE STATE & LOCAL CODES FOR YOUR AREA!

SPECIAL FEATURES

NONE

	l, IHE U	NDERSIGNED, AGR	EE THAT THE PRODUCT AS			
	REPRE	SENTED SATISFIES D	ESIGN AND DIMENSION			
Α	REQUIRE	MENTS. I ALSO AC	KNOWLEDGE MY DUTY TO			
P CONFIRM PRODUCT AND INSTALLATION						
P	COMPL	IANCE WITH ALL AF	PPLICABLE FEDERAL, STATE			
	AND	LOCAL REGULATION	DNS AND STANDARDS.			
R	ANY MO	DIFIED UNITS A	RE NON-RETURNABL	Ε		
O	1		[] As marked	_		
V		[] As diawii	[] As marked			
Α	Signed:		Date:			
- 1						

┞┖	Printed Name:			
	LEAD TIME WILL ST	TART UPON RECEIPT OF SI	GNED APPROVAL DRAWII	٧G
DISTRI	BUTOR'S NAME:		P.O.# _Y	
٧	ESTIL MANU	FACTURING	W.O.# X	
DRAV	^{VN BY:} T.JM	DATE: 08/21/14	SALES: X	

DRAWN BY: TJM 08/21/14 reference: X

FILE NAME: SCALE: NTS QUOTED LEAD TIME: χ 07-007-013-001

QUOTE # Χ